



AMBULIFT VEHICLE

The unit was designed for the disable passenger and elderly passenger who are confined to the wheelchairs, stretcher etc to board or unboard the aircraft.


There are 2 model as follow:-

- 1) AGRIQUIP AAL 3700
- 2) AGRIQUIP AAL 6000



SAFETY

- Safety chevron sticker on scissor lift
- Vanbody cannot be raised up if the stabilizer not fully down.
- Emergency stop switch in the vanbody, driver panel and chassis controller
- Buzzer alarm when lifting the vanbody and platform
- Buzzer alarm when reversing the truck.
- Engine will be cut off when vanbody not fully down if the gear engage.
- Engine will be cut off when the stabilizer not fully if the gear engage.
- Back up emergency recovery system powerpack & handpump
- Anti collision sensor and rubber bumper at front platform bridge.

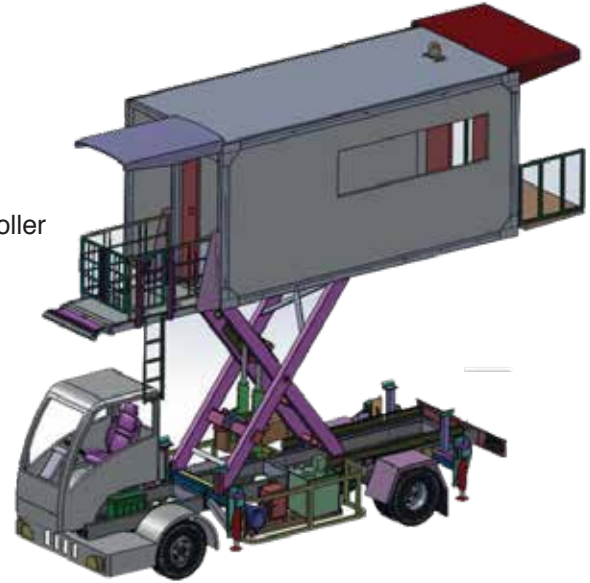

SPECIFICATION

| | AAL 3700 | AAL 6000 |
|-------------------------|-----------------------------------|-------------------------------------|
| Dimension | 6287 mm(L) x 2270mm(W) 3650mm (H) | 10,020 mm(L) x 2400mm(W) 3670mm (H) |
| Front Platform reach | 3750mm Max 2200mm Min | 6000mm Max 2750mm Min |
| Van Body Size | 4500(L) x 2250(W) x 2250(H) | 5500(L) x 2350(W) x 2350(H) |
| Gross Weight | 8500Kg | 11000Kg |
| Transmission | Automatic | Automatic |
| Max Load | 750 KG | 1200 KG |
| Tail Lifter Height(Max) | 0-1300mm | 0-1650mm |
| Tail Lifter Load | Max 300KG | Max 300KG |

APPLICABLE AIRCRAFT

AGRIQUIP AAL 3700

Any aircraft with door sill height no more than 3700mm
B727, B737, A300, A310, A320, A321

AGRIQUIP AAL 6000

Any aircraft with sill height no more than 5600mm
B727, B737, B747, B757, B767, B787
A300, A310, A320, A330, A340, A350, A380 (Lower deck only)

IATA COMPLIANCE

AHM 904, AHM 910, AHM 913, AHM 915, AHM 921



AGRIQUIP

AGRIQUIP MACHINERY SDN BHD

(Reg No. 612132-A)

Factory & Office Address :

Lot 5936, Jalan Salak Tinggi / Banting, RTB Bukit Changgang,
42700 Banting, Selangor Darul Ehsan, MALAYSIA.